


## コンパクト 4.5インチ サーフェスマウント スピーカー

i-4.5t

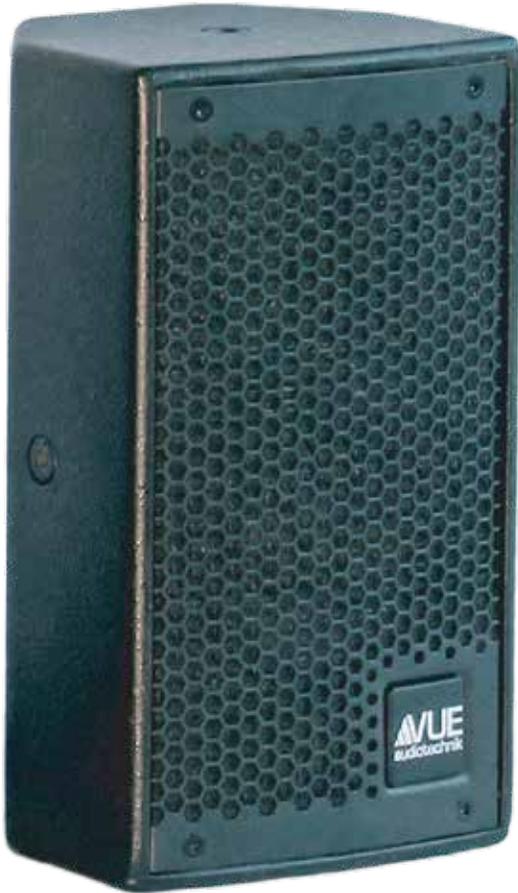

## 特徴

- ・ 4.5" ポリプロピレンLFドライバー
- ・ 1"シルクドームツイーター
- ・ 70° x 70°の指向性
- ・ 周波数特性 100 Hz-20 kHz
- ・ 最大出力音圧レベル 109 dB SPL
- ・ 16Ω / ハイインピーダンス(70V・100V) 対応
- ・ 耐久性のあるMDF材使用の木製エンクロージャー
- ・ 標準で2種類のブラケットが付属

## 用途


- ・ レストラン・カフェ・バー・クラブ
- ・ エンターテインメント施設
- ・ 小中規模集会所 観光地
- ・ ショッピングモール・商業施設・空港
- ・ インフィルやステージリップ
- ・ デイリースピーカー

## 説明

i-Classスピーカーは、現行のプラスチック製ボックスシステムに代わる高性能な代替品を探しているユーザーに向けて特別に設計した木製エンクロージャーを採用しました。そのため、最高のプラスチックエンクロージャーよりも共振が大幅に少なく、音の忠実度が大幅に向上していてBGM再生から大規模な分散型PAシステムの補助フィルまで、様々な環境に対応できるプレミアム商用スピーカーです。

i-4.5tは、コストパフォーマンスが最重要視される近接空間音場用途に特別に設計されたコンパクトな2ウェイスピーカーです。ドライバーには、4.5インチのシングルウーファーと1インチのシルクドームツイーターが使用されています。高密度木製エンクロージャーはインテリアのデザインにマッチし角度の付いたキャビネット設計により、付属の取付金具を使用して天井やコーナーに簡単に設置できます。

i-4.5t 寸法図

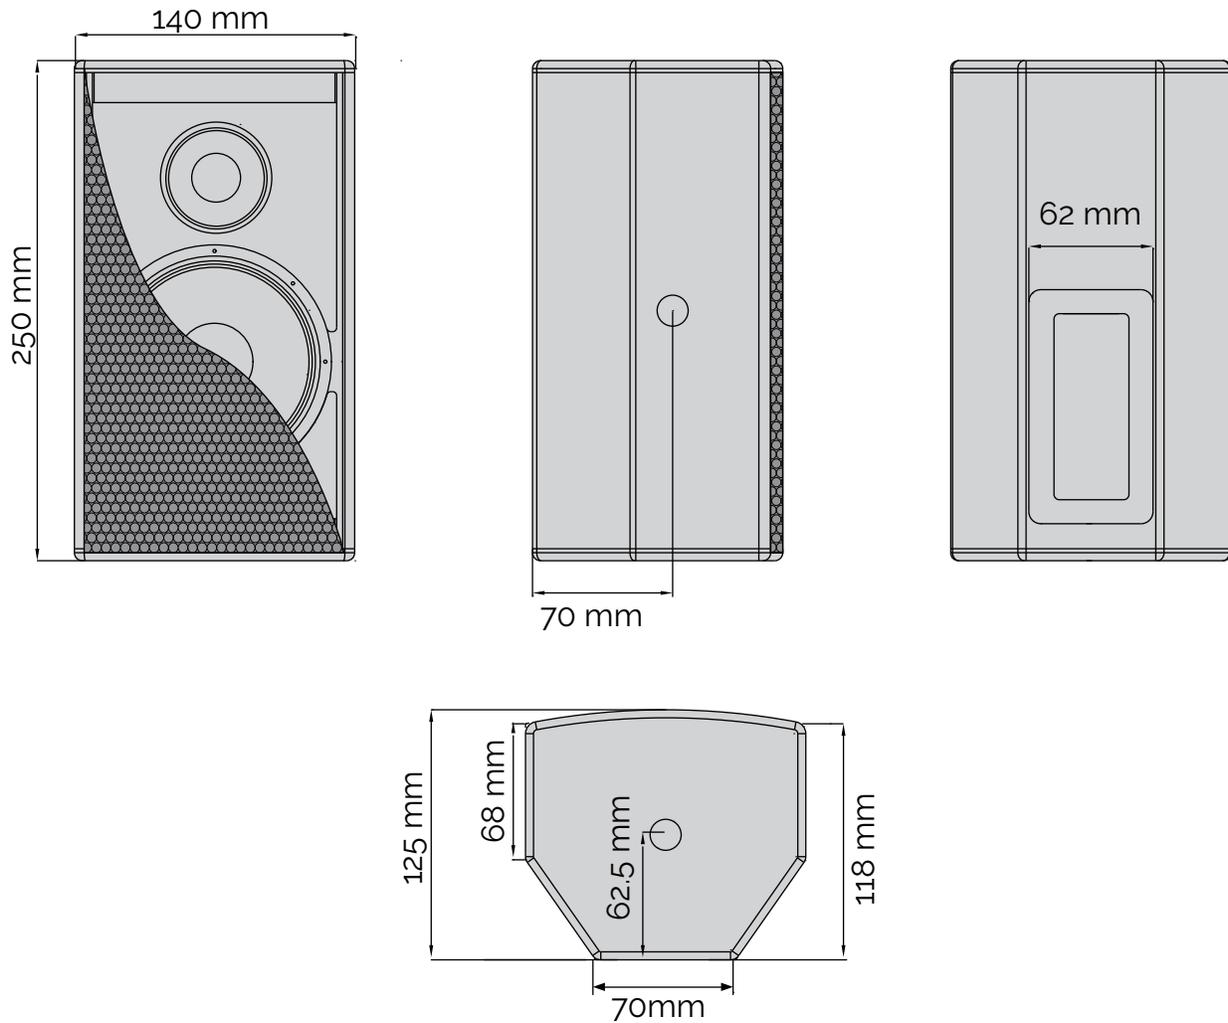

<p><b>DIMENSION:</b> IN MILLIMETERS ROUNDED TO 0.005 mm</p> <p><b>TOLERANCES:</b> ±/ - 1.5 mm OUTER TOTAL BOX DUE TO PRODUCTION VARIATIONS IN TEXTURES AND MATERIAL TOLLORENCE. REFERENCE DIMENTIONS NO TOLLORENCE IMPLIED.</p> <p>VUE RESERVES THE RIGHT TO MAKE PRODUCTION IMPROVMENT CHANGES AT ANY TIME. PLEASE CONFIRM W/HERE CRITICAL DIMENSIONS ARE NEEDED</p>	<p><b>RELEASE AND APPROVALS:</b> ENG./DESIGN./PRODUCTION:</p>		<p><b>VUE</b> VUE AUDIOTECHNIK LLC. audiotechnik WWW.VUEAUDIO.COM</p>
			<p><b>MODEL:</b> i-4.5t</p>
			<p><b>DESCRIPTION:</b> Compact 4.5-inch surface-mount 2-way Speaker</p>
			<p><b>DRAWING REVISION:</b> REV C</p>