

Jensen®

loudspeakers

Vintage AlNiCo

P 12 R 8Ω
Code ZJ06080
12" 25W

LOWS:
Loose

MIDS:
Firm

HIGHS:
Bright

OVERDRIVE:
Edgy/Crunchy

Sound Features:



Guitarist Description:

Straightforward, bright tone.

Specifications	
Nominal Diameter	307 mm (12")
Nominal Impedance	8 Ω
Rated Power AES ⁽¹⁾	25 W
Continuous Program Power ⁽²⁾	50 W
Sensitivity @ 1W/1m	93.7 dB
Voice Coil Diameter	25 mm
Voice Coil Winding Depth	8 mm
Magnetic Gap Depth	6 mm
Flux Density	0.96 T
Magnet Weight	200 g
Net Weight	1.5 kg

Thiele & Small Parameters ⁽³⁾			
Re	6.05 Ω	Fs	80.0 Hz
Qms	13.07	Mms	25.2 g
Qts	2.10	Bxl	5.53 Tm
Cms	157 μm/N	Sd	490.9 cm ²
Vas	54.0 l	Le (1kHz)	0.50 mH

Constructive Characteristics	
Magnet	AlNiCo
Basket Material	Pressed Sheet Steel
Voice Coil Winding Material	Copper
Voice Coil Former Material	Kapton
Cone Material	Paper
Surround Treatment	No
Surround Material	Paper - Integrated
Dust Dome Material	Solid Paper

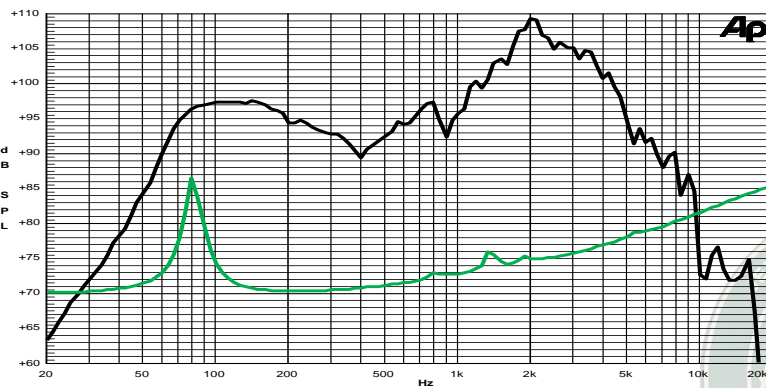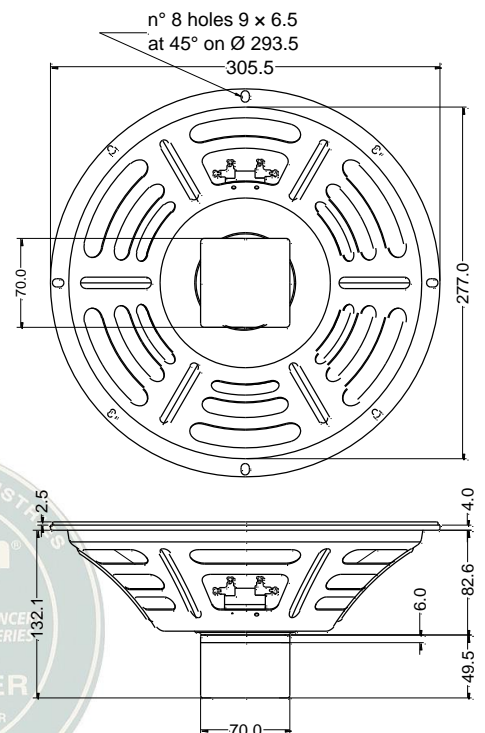

Note:

- 1: Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
- 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
- 3: Thiele & Small parameters measured with laser system without preconditioning test
- 4: Drawing dimensions: mm
- 5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

30/01/15